

How to measure for Roller Blinds



What you'll need:



Pen/Pencil



Paper




Measuring tape

Inside (reveal) fit


Inside /reveal fitted blinds are mounted inside the window opening.

Measure and use the 'tight' measurement for width and drop. Use a metal tape. The factory will make minor deductions required to allow for fitting into the opening.

Measure in 3 places for both the width and the drop, use the smallest measurements.

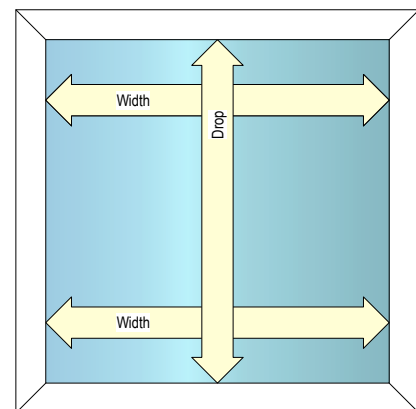

NOTE: The brackets and operating mechanism are included in the width that you order. The fabric will be approximately 31mm narrower than the opening. There will be light gaps of approximately 17/14 mm on respective side.

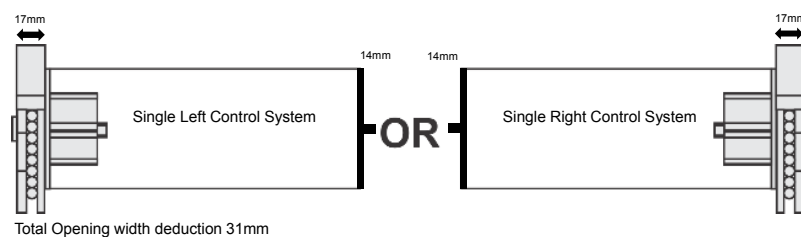

NOTE: If 2 blinds in one opening are required enter the tight overall measurement (critical) and then enter the width of each blind.





Please see next page for 'Face (outside) fit'

Face (outside) fit

Outside fit blinds are mounted outside the window opening.

Measure the size of the recess, then add a little extra on all sides to ensure adequate coverage. No deductions will be taken off the measurements provided.

NOTE: When measuring the width, remember that you are measuring for the placement of the brackets, **not** the fabric width. The fabric on a roller blind will be approximately 31mm narrower than the width you provide.

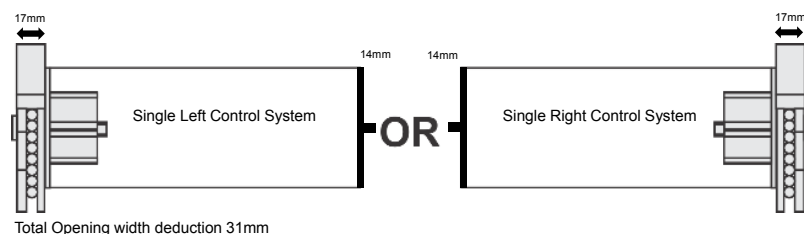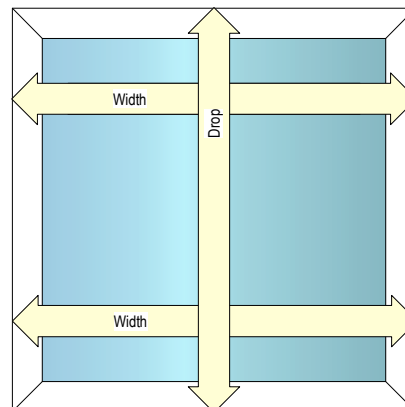

NOTE: For the best light control we suggest Face fitted blinds / Back Rolled with approximately 50mm added to both sides of the window opening width (100mm to the width) and 70mm to the window opening drop.

If you are **replacing an existing blind** with one of the same size, simply measure the blind (including its fittings) and specify face fitting, we will make you one the same size.





Please see next page for 'Two blinds in ones' and 'Two blinds in one opening combo'


Two blinds

2 blinds can be linked in one opening. This reduces the gap between the blinds. The blinds can either be controlled by one or 2 controls.

Two blinds in one

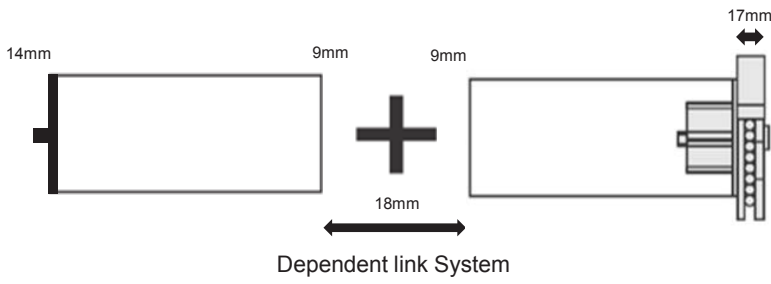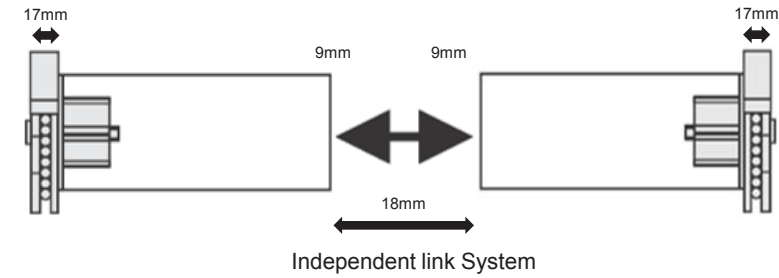








Two blinds in one opening combo

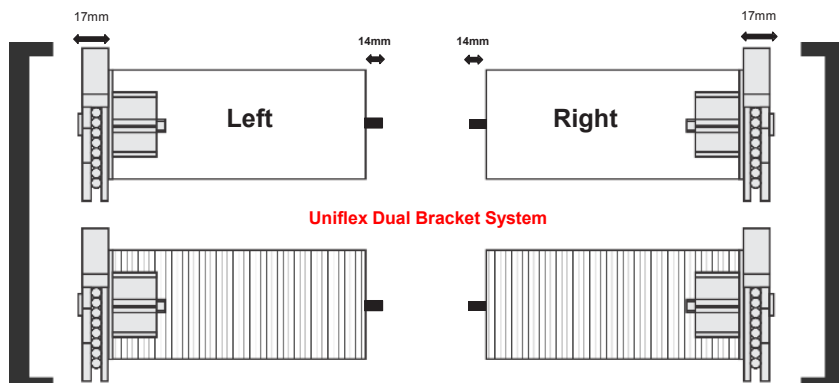

Please see next page for 'Corner or bay window' and 'Roller direction'

Corner or bay window


Please advise the option below that matches your situation, fill in the appropriate width dimensions. Only complete the front or back measurements not both. We can then make the appropriate size adjustments for the blinds.



Roller direction


Front/forward rolled

The roll is to the window side offering a clean look into the room. Works well to avoid the fabric touching handles etc when the blind is dropped.

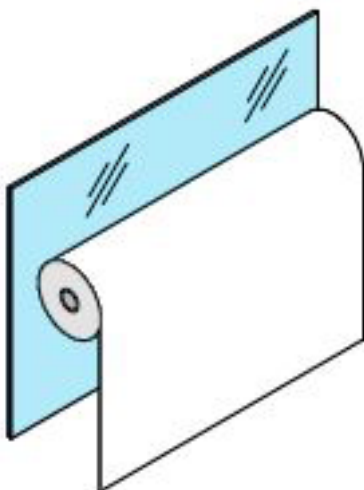

Back rolled

The fabric rolls off the back. This works well if the blind is face fitted minimizing the light gap.

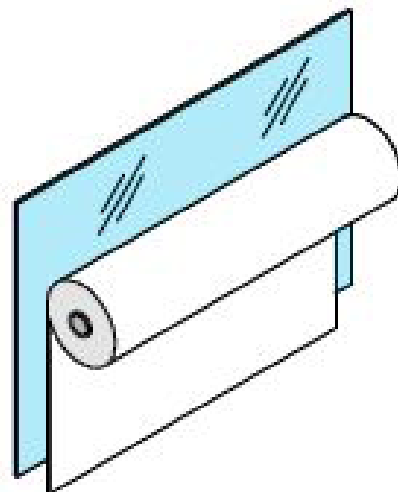

NOTE: Some fabrics have a different colour backing. The backing will be seen on the rolled up portion.